

Features

- Compact
- Sealed
- Long life
- Infinite resolution
- Free shaft rotation
- AC or DC
- Shaft options available
- Flexible wire leads
- Economical
- RoHS compliant*

3046 Linear Motion Potentiometer

Specifications†

Standard Electrical Travel	0.15, 0.25, 0.35 in. (3.81, 6.35, 8.89 mm)
Standard Resistances	1K to 50K ohms (±20 %)
Independent Linearity	±5 %
Resolution	Infinite
Power Rating @ 70 °C (158 °F)	0.125 watt
Operating Temperature Range	-55 °C to +125 °C
Temperature Coefficient	1000 PPM/°C
Insulation Resistance	50 megohms @ 500 VDC
Backlash	Negligible
Shaft Actuating Force	2N max. @ 21 °C
Life	500,000 cycles
Shock	50 G for 7ms
Vibration	20 G, 10-2K Hz
Marking	Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style

Specifications are typical. Contact factory for special requirements.
 † Specifications applicable from 5 % to 95 % of electrical travel.

How to Order


3046 L - 2 - 502

Model	_____
Style	_____
Range (Travel)	_____
1 = 0.15" (3.81 mm)	
2 = 0.25" (6.35 mm)	
3 = 0.35" (8.89 mm)	
Resistance Value	_____

Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
2,500	252
5,000	502
10,000	103
20,000	203
50,000	503

Product Dimensions

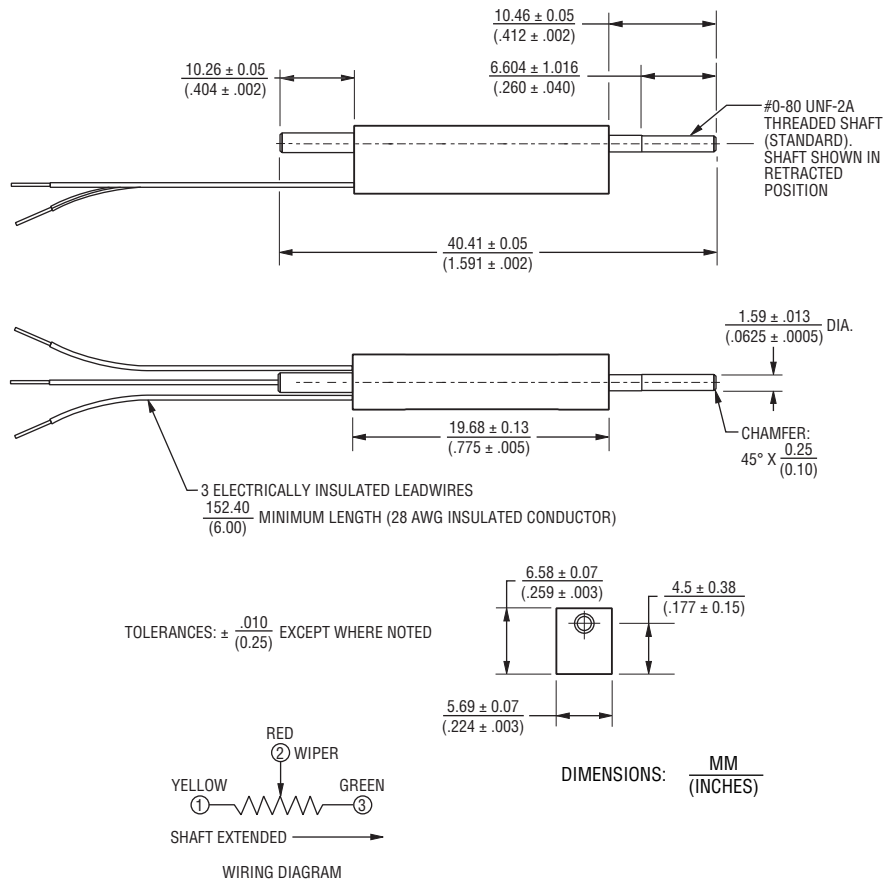

REV. 04/15

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011. Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

For more information about this product, visit our website at:

www.potentiometers.com