


**6180 Series**  
**7/8" Diameter**  
**Single Turn, Conductive Plastic**  
**Precision Potentiometer / Position Sensor**

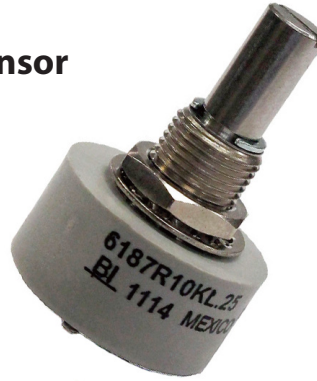

For more information about this product, visit our website at:  
[www.potentiometers.com](http://www.potentiometers.com)

**Model Styles**

6181	1/8" Shaft, 1/4" Bushing
6184	6 mm Shaft, 3/8" Bushing
6186	1/8" Shaft, 3/8" Bushing
6187	1/4" Shaft, 3/8" Bushing
6188 for side load applications	1/4" Shaft, 3/8" Bronze Bushing

**Electrical Specifications <sup>1</sup>**

Resistance Range	1K to 100K Ohms
Standard Resistance Tolerance	±10%
Minimum Practical Resistance Tolerance	±5%
Independent Linearity <sup>2</sup>	±1%
Minimum Practical Independent Linearity	±0.5%
Input Voltage	400 VDC maximum, not to exceed power rating
Power Rating	1.0 Watt at 70°C, derating to 0 at 125°C
Dielectric Strength	750 V rms
Insulation Resistance	1,000 Megohms minimum
Output smoothness	0.1% maximum
Actual Electrical Travel	340° nominal (300° with stop feature)
Electrical Continuity Travel	350° nominal (320° with stop feature)
End Voltage	maximum 0.5% of input voltage
Resolution	essentially infinite
Temperature Coefficient of Resistance <sup>3</sup>	-400 ppm/°C typical
Temperature Coefficient of Output Voltage <sup>4</sup>	±10 ppm/°C typical

**Mechanical Specifications**

Total Mechanical Travel	360° continuous (320° ±3° with stop feature)
Number of Gangs	1 maximum
Weight	0.53 oz. nominal (single gang)
Backlash	1° maximum
Static Stop Strength	40 in.-oz. maximum
Start/Run Torque	1.0 in.-oz.
Panel Nut Tightening Torque	25 in. lb. maximum
Construction	zinc die cast housing, stainless steel shaft, bronze bearing
Hazardous Materials	Pb free, E.U. RoHS compliant, no REACH SVHC's

1 Specifications subject to change without notice.  
2 Linearity is measured between 1% and 99% of input voltage.  
3 Special TCR available to ±100 ppm/°C.  
4 Measured with 10 VDC CW to CCW and slider at 50% of electrical travel




# 6180 Series

## Environmental (MIL-R-39023)

Operating Temperature Range	-40°C to +125°C dynamic, -65°C to +125°C static
Temperature Cycling	5 cycles, -65°C to +125°C, maximum 10% ΔR
Shock	6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity
Vibration	10 G's, 10 to 500 Hz, maximum 2% ΔR, 0.1 ms maximum discontinuity
Moisture Resistance	five 24 hour cycles, maximum 25% ΔR
High Temperature Exposure	1,000 hours at 125°C, maximum 0.5% ΔVR
Rotational Life	5 million shaft revolutions (no sideload, 6188 up to 8 oz sideload)
Rotational Load Life	5 million shaft revolutions, maximum 10% ΔR
Ingress Protection Rating (IP Code)	IP50, IP66 available as option (feature code ES)

## Ordering Information

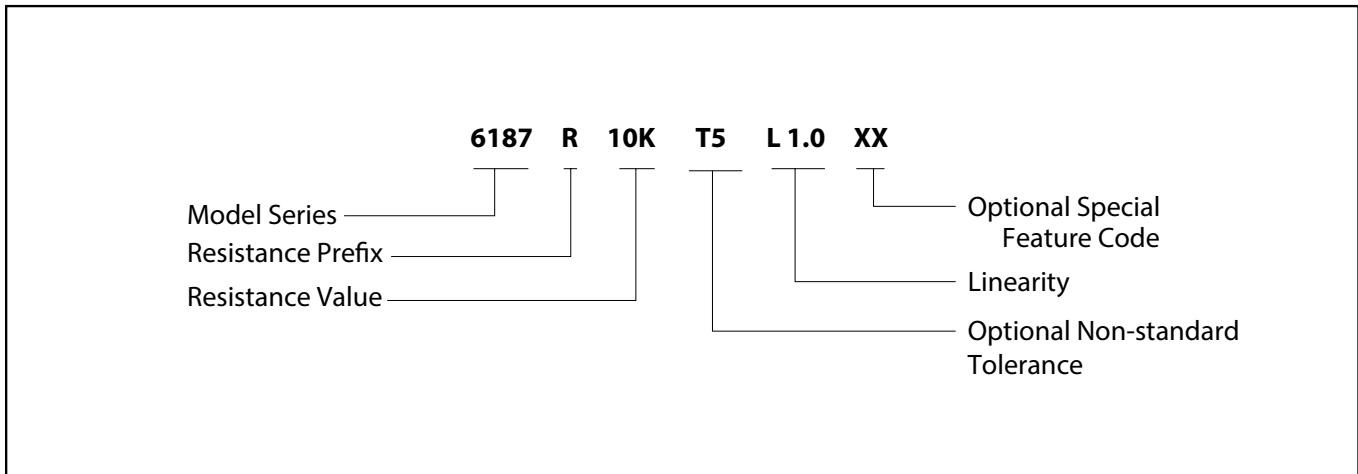


## Feature Codes

Center Tap	CT
Linearity Tape	LT
Shaft Lock (6187 only)	SL
Stop	ST
Seal (IP66) 6184, 6187, or 6188 only	ES

When multiple feature codes are used, the P/N shall be in the same sequence as listed in this table (top to bottom).

## Circuit Diagram

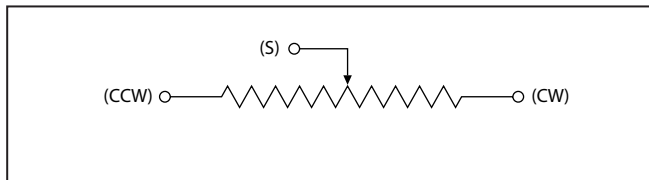


## Standard Resistance Values, Ohms

1K	2K	5K	10K	20K	50K
----	----	----	-----	-----	-----


# 6180 Series

## Outline Dimensions (Inch/mm)

### Model 6181

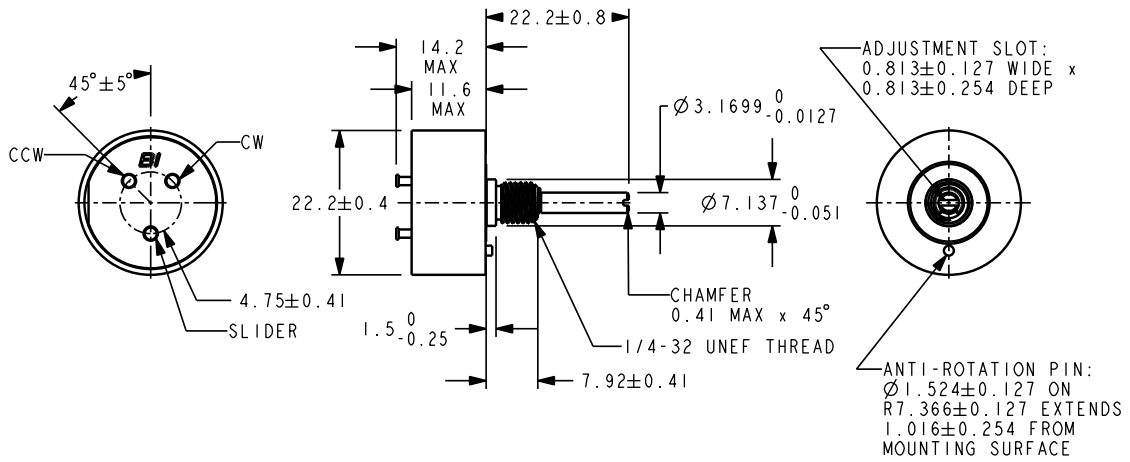

### Models 6184, 6186, and 6187

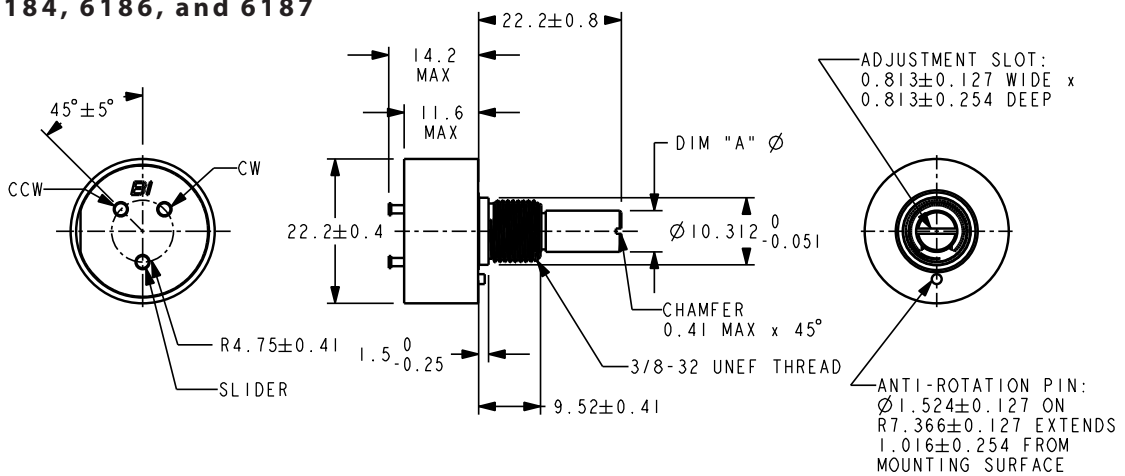

Dimensions in mm

DIM	MODEL 6184	MODEL 6186	MODEL 6187
A	6.0 +0.0000 -0.0127	3.1699 +0.0000 -0.0127	6.3424 +0.0000 -0.0127

For more information about this product, visit our website at:

[www.potentiometers.com](http://www.potentiometers.com)



© State Electronics

36 State Route 10, STE 6 • East Hanover, NJ 07936-0436  
973-887-2550 • Toll Free 1-800-631-8083 • Fax 973-887-1940

<http://www.potentiometers.com>