

Model 6671, 6673
2" Diameter
Single Turn, Conductive Plastic
Precision Potentiometer / Position Sensor



For more information about this product, visit our website at:
www.potentiometers.com



Model Styles

6671	1/4" Shaft, 3/8" Bushing
6673	1/4" Shaft, Servo

Electrical Specifications ¹

Resistance Range	1K to 300K Ohms
Standard Resistance Tolerance	±10%
Minimum Practical Resistance Tolerance	±3%
Independent Linearity ²	±0.25%
Minimum Practical Independent Linearity	±0.1%
Input Voltage	400 VDC maximum, not to exceed power rating
Power Rating	3.5 Watts at 70°C, derating to 0 at 125°C
Dielectric Strength	1,000 V rms
Insulation Resistance	1,000 Megohms minimum
Output smoothness	0.1% maximum
Actual Electrical Travel	350° nominal
Electrical Continuity Travel	354° minimum
End Voltage	maximum 0.5% of input voltage
Tap Tolerance	maximum 0.5% of input voltage
Resolution	essentially infinite
Temperature Coefficient of Resistance ³	-400 ppm/°C typical
Temperature Coefficient of Output Voltage ⁴	±10 ppm/°C typical

¹ Specifications subject to change without notice.
² Linearity is measured between 1% and 99% of input voltage.
³ Special TCR available to ±100ppm/°C..
⁴ Measured with 10 VDC CW to CCW and slider at 50% of electrical travel.

Model 6671, 6673

Mechanical Specifications

Total Mechanical Travel	360° continuous
Number of Gangs	4 maximum
Weight	4.0 oz. single gang nominal, 1.5 oz. each added gang
Shaft Runout	maximum T.I.R. 0.001"
Pilot Diameter Runout	maximum T.I.R. 0.0015"
Lateral Runout	maximum T.I.R. 0.005"
Shaft Radial Play	maximum 0.002"
Start/Run Torque	maximum 1.5 / 1.0 oz.-in. per gang

Environmental (MIL-R-39023)


Operating Temperature Range	-40°C to +125°C dynamic, -65°C to +125°C static
Temperature Cycling	5 cycles, -65°C to +125°C, maximum 10% ΔR
Shock	6 ms Saw-tooth, 100 G's, 0.1 ms maximum discontinuity
Vibration	15 G's, 10 to 2,000 Hz, maximum 2% ΔR, 0.1 ms maximum discontinuity
Moisture Resistance	ten 24 hour cycles, maximum 10% ΔR
High Temperature Exposure	1,000 hours at 125°C, maximum 0.5% ΔR
Rotational Life	25 million shaft revolutions
Rotational Load	Life 5 million shaft revolutions plus 900 hours at 3.5 Watts & 70°C, maximum 10% ΔR

Special Features


Center Tap	CT
Linearity Tape	LT
Flatted Shaft	FS
Slotted Shaft	SS
Rear Shaft Extension	RS
Shaft Lock, 6671 only	SL
Additional Gangs	2G, 3G, or 4G

Model 6671, 6673

Ordering Information

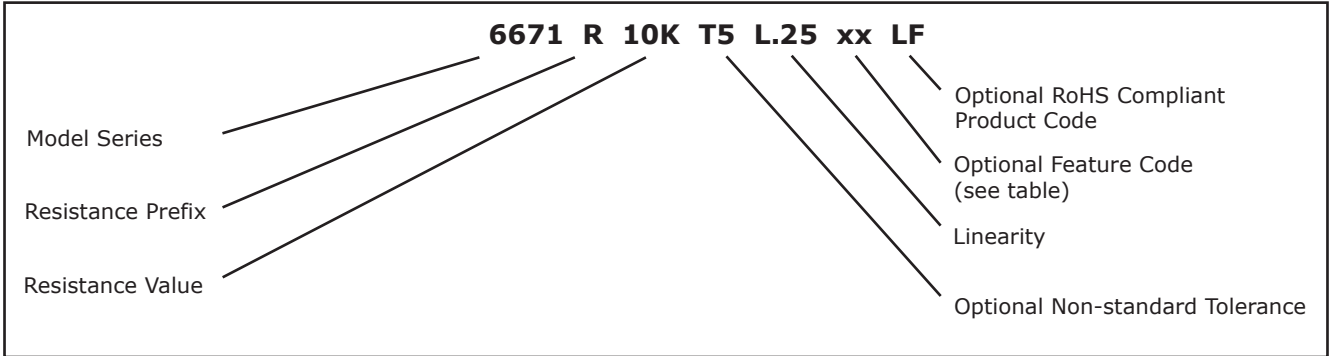

Circuit Diagram

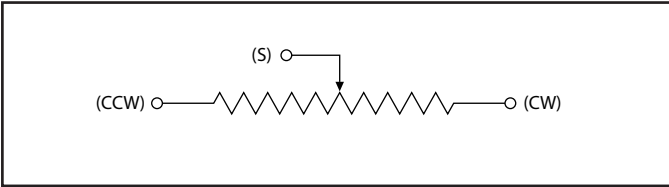

Standard Resistance Values, Ohms

1K 2K 5K 10K 20K 50K.

Model 6671, 6673

Outline Dimensions (Inch/mm)

