

SLNB22 Wirewound Potentiometer - .866" Dia.



For more information about this product, visit our website at: www.potentiometers.com



Series SLNB22 potentiometers feature Wirewound elements, Low Torque, and Servo Mounting

Features

- Wirewound resistive element
- Servo Mount

Electrical Specifications

Resistance Range: 10 to 20K ohms standard
Resistance Tolerance: $\pm 3\%$
Independent Linearity: $\pm 0.5\%$
Electrical Rotation: $355^\circ \pm 5^\circ$
Power Rating: 0.75 watts
Insulation Resistance: 100 Megohms @ 1000VDC
Dielectric Strength: 1000 VAC
Input Voltage: 80 Volts Max


Mechanical Specifications

Mechanical Rotation: Continuous
Servo Mount: Ball Bearing
Torque: .021 oz. in. Max
Weight: 0.6 oz.
Rotational Life: 100,000 Turns rated

Environmental Specifications

Operating Temperature: -30°C to $+85^\circ\text{C}$

SLNB22 Wirewound Potentiometer - .866" Dia.

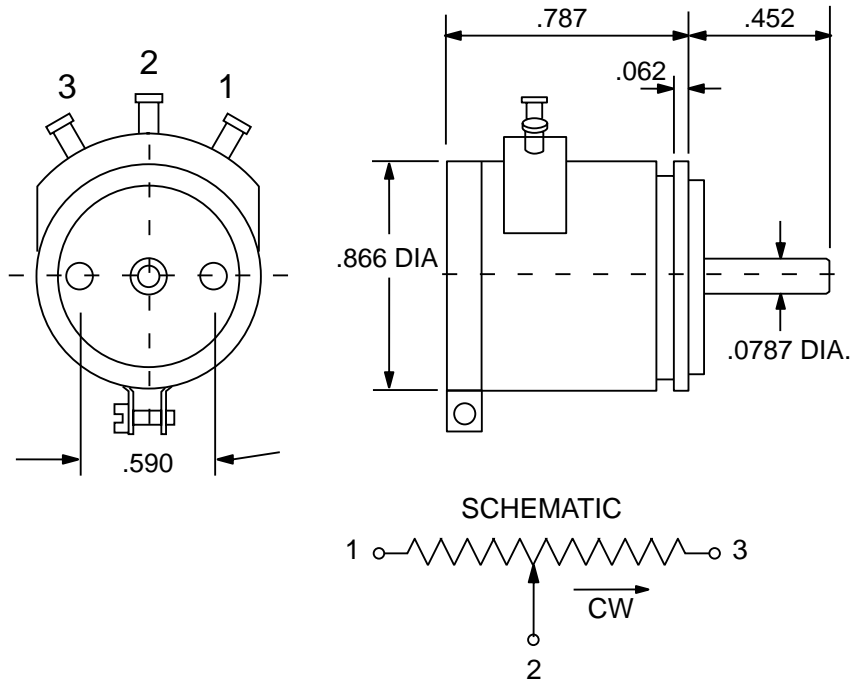

Ordering Information

Example Part Number: **SLNB22-10K-CT**

SLNB22	10K	CT
Model	Resistance	Options
SLNB22	10 = 10 ohms 20 = 20 ohms 50 = 50 ohms 100 = 100 ohms 200 = 200 ohms 500 = 500 ohms 1K = 1K ohms 2K = 2K ohms 5K = 5K ohms 10K = 10K ohms 20K = 20K ohms	CT = Center Tap SB = Sealed Body

For more information about this product, visit our website at: www.potentiometers.com



© State Electronics
 36 State Route 10, STE 6 • East Hanover, NJ 07936-0436
 973-887-2550 • Toll Free 1-800-631-8083 • Fax 973-887-1940
<http://www.potentiometers.com>