

Models 2641, 2646, 2647

Concentric 7/8" Turn-Counting Dial



For more information about this product, visit our website at: www.potentiometers.com



Series 2640 Precision Concentric
7/8" Diameter Analog Turn-Counting Dial

Features

- Counts up to 20 turns
- One Piece Mounting, 7/8" Diameter
- Aluminum Housing
- Housing Finish: Satin Chrome
- Knob Material: Black Plastic
- Dial Finish: White Numerals on Black Matte
- Positive Action Over Center Locking Mechanism

Mechanical Specifications

Model 2641 - **15 Turns, 1/8" Shaft, 1/4" Bushing; 1 setscrew**

Model 2646 - **20 Turns, 1/4" Shaft, 3/8" Bushing; 1 setscrew**

Model 2647 - **20 Turns, 1/4" Shaft, 3/8" Bushing; 2 setscrews**

Model 2646S - **15 Turns, 1/4" Shaft, 3/8" Bushing; 1 setscrew**

Model 2647S - **15 Turns, 1/4" Shaft, 3/8" Bushing; 2 setscrews**

Diameter: 7/8 inch

Shaft Extension from Panel:

2641 - 0.672" to 0.781"

2646, 2647 - 0.628" to 0.781"

2646S, 2647S - 0.578" to 0.781"

Bushing Extension from Panel:

2641 - 0.270"

2646, 2647, 2646S, 2647S - 0.300"


Maximum Panel Thickness - 1/4"

Weight: .6 oz.

Operating Temp Range: -55°C to +71°C

Models 2641, 2646, 2647

Concentric 7/8" Turn-Counting Dial

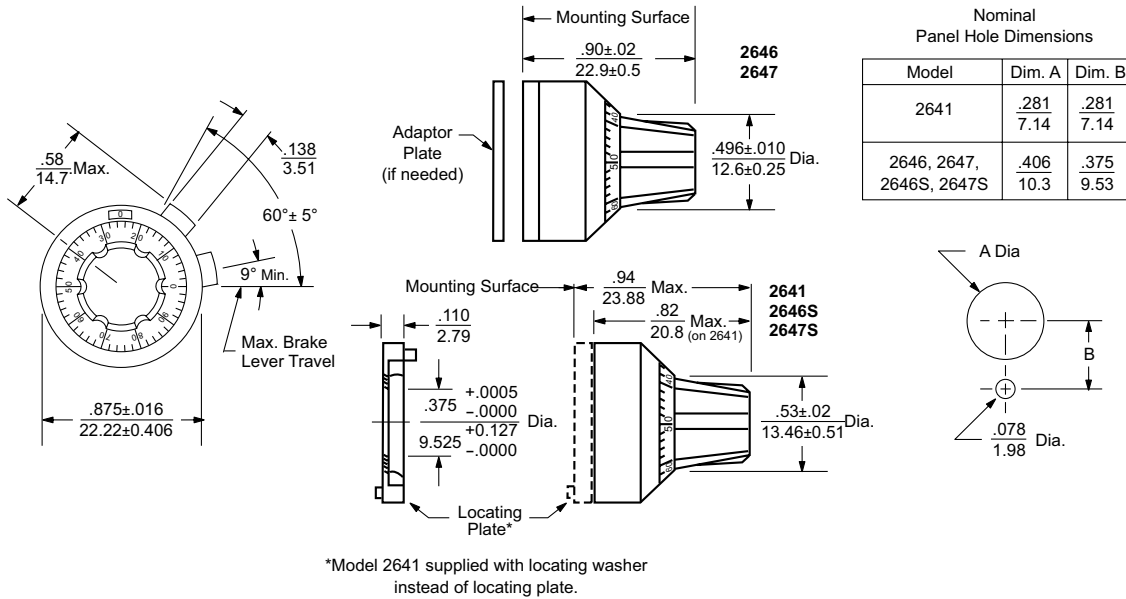

Ordering Information

Example Part Number: **2641**

2641

Model

- 2641** - 15 Turns, 1/8" Shaft, 1/4" Bushing; 1 setscrew
- 2646** - 20 Turns, 1/4" Shaft, 3/8" Bushing; 1 setscrew
- 2646S** - 15 Turns, 1/4" Shaft, 3/8" Bushing; 1 setscrew
- 2647** - 20 Turns, 1/4" Shaft, 3/8" Bushing; 2 setscrews
- 2647S** - 15 Turns, 1/4" Shaft, 3/8" Bushing; 2 setscrews

For more information about this product, visit our website at: www.potentiometers.com



© State Electronics

36 State Route 10, STE 6 • East Hanover, NJ 07936-0436
 973-887-2550 • Toll Free 1-800-631-8083 • Fax 973-887-1940
<http://www.potentiometers.com>